LTC Batteries

SL-886 Size: ⅙D

› XOL – extended operating life

Performance Data

(Typical values for batteries stored at +25 °C for one year)

System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	1.7 Ah
Nominal current	0.5 mA
Max. continuous discharge current	10 mA
Pulse current capability	20 mA
Anode surface area	7.5 cm^2
Lithium content	0.5 g
Weight	21 g
Volume	8.2 cm^3
Temperature range	–55 °C ... +85 °C

Typical Discharge Curves at +25 °C

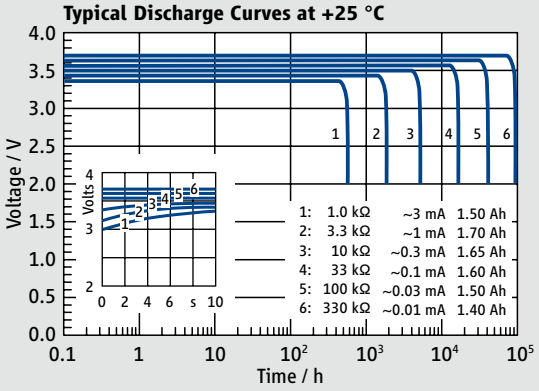

Available Capacity

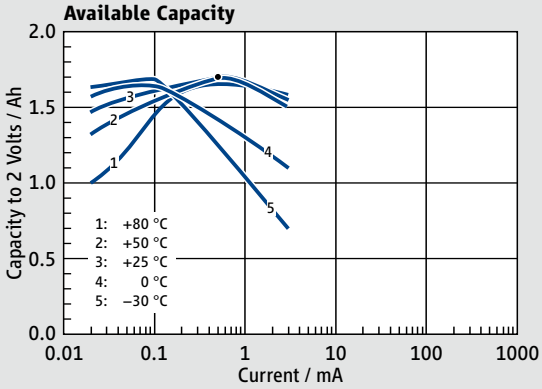

Operating Voltage

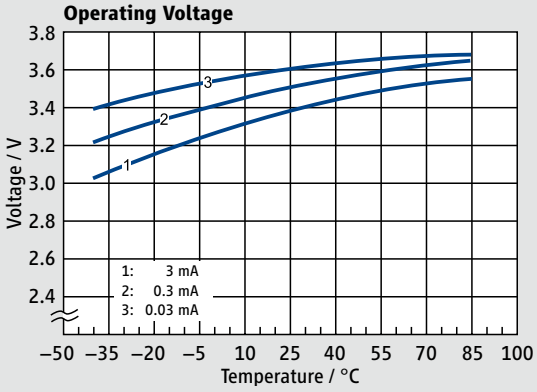

SL-886

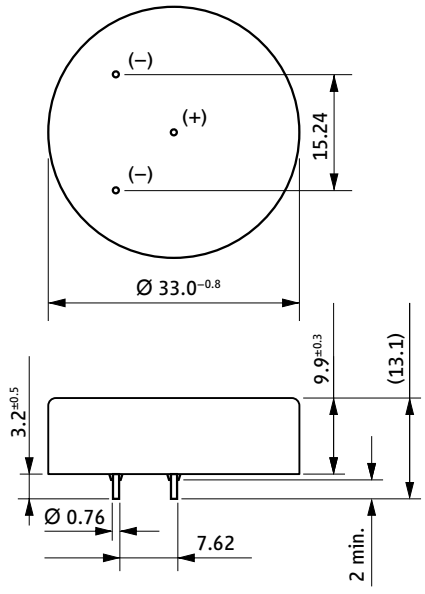

Available Terminations		Catalogue No.
SL-886/P	Pins	11 1 18864 00

WARNING: Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

Tadiran Batteries GmbH • Industriestr. 22 • 63654 BÜDINGEN
GERMANY • Tel.: +49 (0)6042 954-0 • www.tadiranbatteries.de

PDC25Eng