



TLI-1550SC

- RECHARGEABLE
- High power + high energy
- Extremely low self discharge rate
- Charging possible at extreme temperatures

Performance Data



(Typical values for batteries stored at +25 °C for one year)

System	Lithium Intercalated Compounds	
Max. capacity	1,050 mAh	
Max. continuous discharge current	5 A	
Pulse current capability	10 A	
Discharge end voltage	2.0 V	
Max. charge voltage	4.2 V	
Max. charge current	100 mA	50 mA
Temperature range	-20 °C ... +50 °C	-40 °C ... +85 °C
Cell impedance @ 1 kHz, RT	max. 100 mΩ	
Nominal energy	3.7 Wh	
Weight	22 g	


For more information please refer to page 49.



TLI-1550SC/S

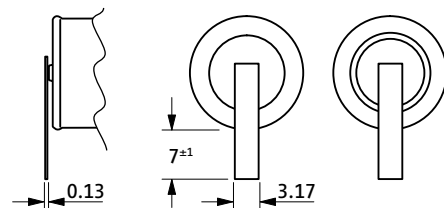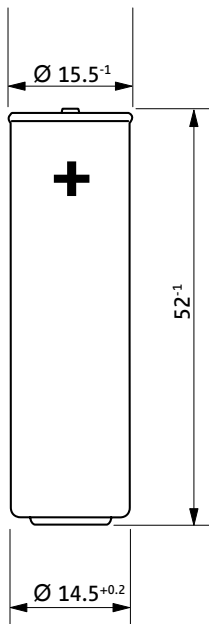

TLI-1550SC/T

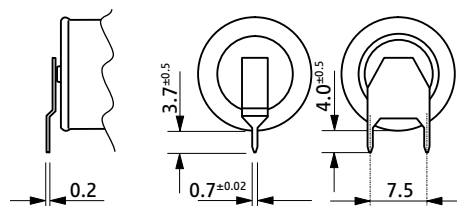

TLI-1550SC/TP

Available Terminations

Termination	Standard	Catalogue No.
TLI-1550SC/S	Standard	on request
TLI-1550SC/T	Tags*	on request
TLI-1550SC/TP	Polarized tags*	on request


* versions with PTC SRP 200 on request

WARNING:


Fire, explosion, and severe burn hazards. Do not disassemble, heat above 100 °C, short circuit, incinerate or expose contents to water.

Do not charge above 4.0 V. Please refer to TLI-guidelines.


Discharge Curves at Room Temperature

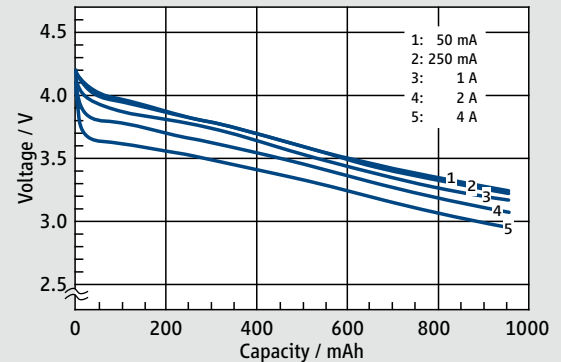

Discharge Curve at 1 A

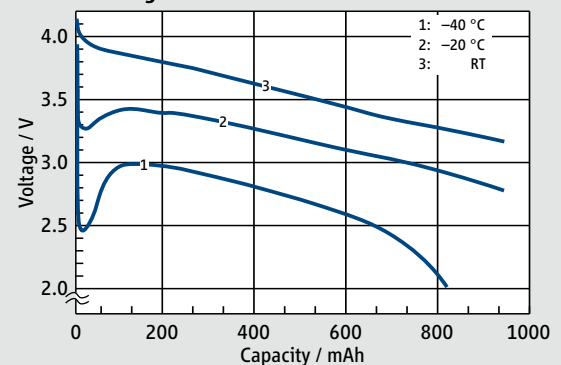

Pulse Capability at RT, 4.2 V Potential

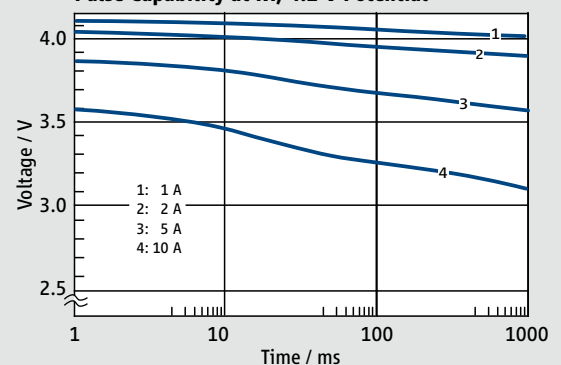

Capacity vs. OCV

